

addendum Ducati 1098



1) Ignition coils


Disconnect 3way connectors from both ignition coils and insert connectors from QS wiring harness.



Ignition coil connector

Connectors for rear ignition coil

Connectors for front ignition coil

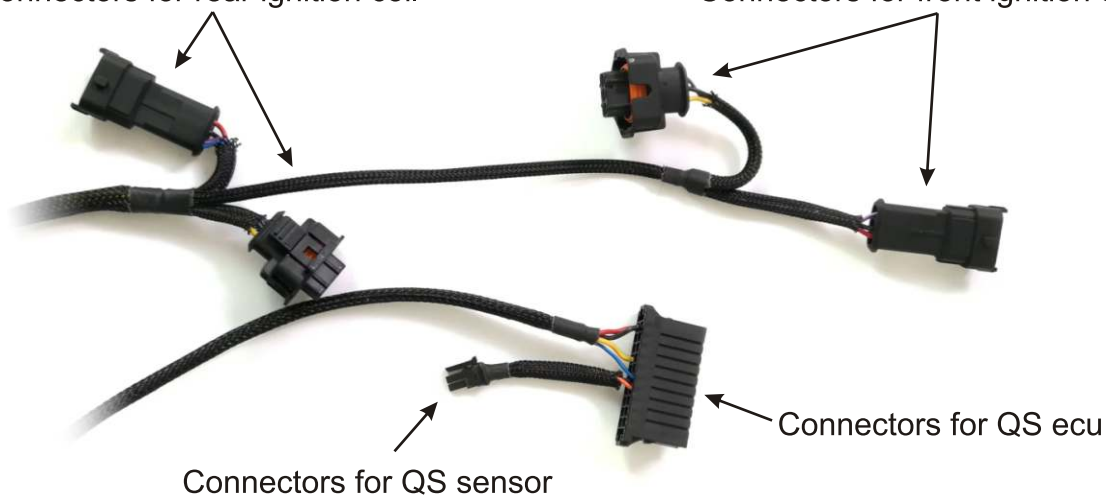

2) QS sensor

Place QS sensor with delivered rod instead of the original shifting rod.

